


# PowerRack HV4F

Dynness HV4F rack system is also designed for indoor use high-voltage systems, with a larger capacity of each module to fit medium C&I scenarios, to increase solar self-consumption, provide backup power or peak-shavings, etc.



**Voltage Range**  
313.6~876V

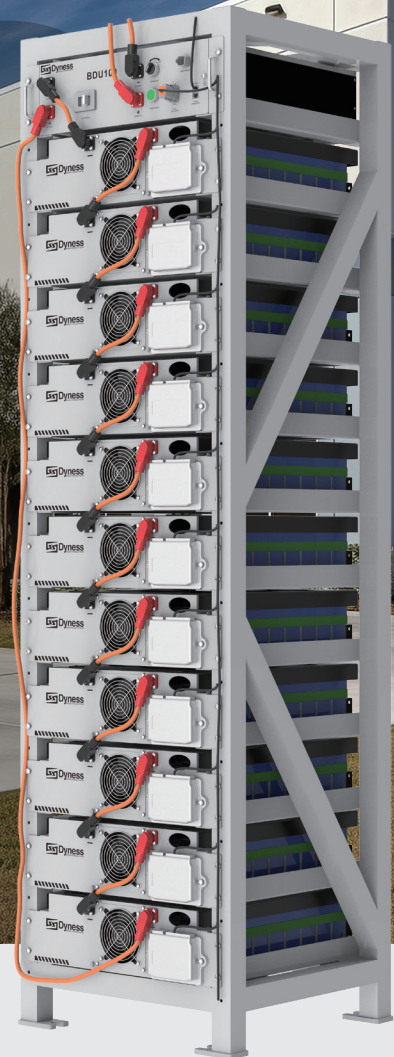

**High Safety LFP**  
LFP & smart BMS



**Expandable**  
Capacity up to 76.8kWh per cluster



**Tailor-made Cabinet**  
Suitable for multi-module installation



**High Voltage**  
High system efficiency



**Wide Application**  
Cover all needs in commercial fields

# Technical Specifications

Model	HV51100F
Battery Type	LiFePO4
Nominal Battery Energy	5.12kWh
Nominal Capacity	100Ah
Nominal Voltage	51.2V
Net Weight	47kg
Dimension(W*D*H)	548*554*152.8mm
Charging Temp. Range	0-55°C
Discharging Temp. Range	-10-55°C
Communication	CAN/RS485
Cycle Life <sup>[1]</sup>	>6000 Cycles
Protection Level	IP20
Expansion	7-15 units in series
Certification & Safety Standard	UN38.3

[1]Test conditions: 0.2C Charging/Discharging, @25°C, 95% DOD

Model	PowerRack HV4F	
Rack Type	PowerRack HV4F-8s	PowerRack HV4F-11s
Battery Module Type	HV51100F	HV51100F
Battery Module Quantity	8 units	11 units
Nominal Battery Energy	40.96kWh	56.32kWh
Nominal Capacity	100Ah	100Ah
Nominal Voltage	409.6V	563.2V
Operating Vol. Range	358.4~460.8V	492.8-633.6V
Nominal Power Output	40.96kW	56.32kW
Max. Power Output	40.96kw	56.32kW
Recommend Charging Current	100A	100A
Recommend Discharging Current	100A	100A
Net Weight	501kg	642kg
Dimension(W*D*H)	594*558*1663mm	594*558*2152mm
Rack System Control Unit Type <sup>[1]</sup>	BDU100	BDU100
Module Quantity and Configuration	8 Units in series	11 Units in series

[1]HV51100F battery module need to be used with BDU100 control unit